

01/22/98



US 549,810, S. PRO

# UTILITY PATENT APPLICATION TRANSMITTAL UNDER 37 CFR 1.53(b)

101-790.00 102-82.00  
ATTORNEY DOCKET 77140DMW

A

To: Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

Express Mail Label No.

EM364956287US

ELECTRONIC CAMERA WITH QUICK VIEW  
AND QUICK ERASE FEATURES

First Named Inventor (or Application Identifier):

Thomas A. Napoli, et al

Enclosed are:

- |   |   |
|---|---|
| 1. <input checked="" type="checkbox"/> Specification  | 6. <input type="checkbox"/> Assignment of the invention to  |
| 2. <input type="checkbox"/> 3 Sheet(s) of drawing(s)  | 7. <input type="checkbox"/> Certified copy of a priority  |
| 3. <input checked="" type="checkbox"/> Disclosure Statement Under 37 C.F.R. 1.97.   | 8. <input checked="" type="checkbox"/> Letter under Rule 53.  |
| 4. Combined Declaration for Patent Application and Power of Attorney:   |   |
| 4a. <input type="checkbox"/> New  |   |
| 4b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d) (for continuation/divisional with Box 11 completed)  |   |
| 5. <input type="checkbox"/> Incorporation by Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein. | 9. <input type="checkbox"/> Deletion of Inventor(s).<br>Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b). |

10. ☐ Prior to examination of the above-identified application, amend the specification at Page 1, after the title, by inserting the following:

--CROSS REFERENCE TO RELATED APPLICATION

Reference is made to and priority claimed from U.S. Provisional Application Serial No. ,  
filed , entitled .

If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

11. ☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: .
12. ☒ Please address all written communications to Thomas H. Close, Patent Legal Staff,  
Eastman Kodak Company, 343 State Street, Rochester, NY 14650-2201.  
Please Direct all telephone calls to David M. Woods at (716) 477-5256.

The filing fee has been calculated as shown below:

			OTHER THAN A SMALL ENTITY	
FOR:	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$ 790
TOTAL CLAIMS	15 - 20 =	0	x 22 =	\$ 0
INDEPENDENT CLAIMS	4 - 3 =	1	x 82 =	\$ 82
MULTIPLE DEPENDENT CLAIM PRESENTED			+ 270	\$ 0
			<b>TOTAL</b>	<b>\$ 872</b>

- ☒ Please charge my Deposit Account No. 05-0225 in the amount of **\$ 872.**

A duplicate copy of this sheet is enclosed

- ☒ The Assistant Commissioner is hereby authorized to charge any additional filing fees required under 37 CFR 1.16 or credit any overpayment to Deposit Account No. 05-0225.

A duplicate copy of this sheet is enclosed.

Date January 22, 1998

DMW/RR

David M. Woods

David M. Woods

Attorney for Applicants

Registration No. 27,171

Telephone: (716) 477-5256

Facsimile: (716) 477-4646

In the United States Patent and Trademark Office

In re Application of:

Thomas A. Napoli et al

ELECTRONIC CAMERA WITH  
QUICK VIEW AND QUICK ERASE  
FEATURES

Serial No. To Be Assigned

Filed 22 January 1998


Group Art Unit: Unknown

Examiner: Unknown

I hereby certify that this correspondence is being deposited TODAY with the United States Postal Service as Express Mail-Post Office to Addressee in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.



Robin G. Reeves



Date

Express Mail Label No. EM364956287USHonorable Assistant Commissioner for Patents  
Washington, D.C. 20231


Sir:

LETTER UNDER RULE 53

Pursuant to Rule 53, the above-identified application, enclosed herewith (including specification and claims), is being filed without a signed declaration or assignment in the names of the inventors, Thomas A. Napoli, Masaki Izumi, Kyoichi Omata, Carolyn A. Bussi, Clay A. Dunsmore. The declaration and assignment will be filed later.

Please address all correspondence to Thomas H. Close, Patent Legal Staff, Eastman Kodak Company, Rochester, New York 14650-2201. Please direct all telephone communications to David M. Woods at (716) 477-5256.

Respectfully submitted,



David M. Woods  
Attorney for Applicant(s)  
Registration No. 27,171

DMW/RR

Telephone: (716) 477-5256

Facsimile: (716) 477-4646

**ELECTRONIC CAMERA WITH QUICK VIEW AND QUICK ERASE**  
**FEATURES**

**FIELD OF THE INVENTION**

5                   The invention relates generally to the field of electronic photography, and in particular to digital cameras having an image display and review capability.

**BACKGROUND OF THE INVENTION**

10               Some electronic cameras in the prior art use an electronic image display, such as a liquid crystal display (LCD), for image review both before and after capture. In these cameras, the LCD display is powered on prior to image capture, since the LCD is used to review the image prior to capture. For example, in the electronic camera described in U.S. Patent No. 4,456,931, initial depression  
15               of the shutter release causes a motion image to be displayed on a monitor on the camera. Further depression of the shutter release causes a still image to be captured from the motion sequence, stored in a buffer memory, and displayed on the monitor. Complete depression of the shutter release causes the transfer of the still image in the buffer memory to a separate output memory system. In prior art  
20               cameras of this type, considerable power is dissipated in sustained operation of the image display for image review prior to capture.

                  Some digital cameras rely on an optical viewfinder for composing images and an image display, such as an LCD display, for viewing captured still images. For instance, in Serial No. 08/803,342, entitled "Electronic Camera with  
25               Quick Review of Last Captured Image", filed February 20, 1997 in the name of the same assignee as the present application, an electronic camera has a working memory for storing a working image corresponding to the last captured image and a non-volatile memory, such as internal flash memory or a removable memory card. When an image is captured, the image data is stored in the working memory,  
30               and the image data is also immediately processed for storage in the non-volatile memory. The working image is displayed on a display screen in a quick review mode of operation in response to user actuation of a quick review switch. The display screen is thus kept in an inactive state until the quick review is requested, and returns to an inactive state after a predetermined time period or when the  
35               quick review switch is again activated. In this manner, energy to drive the display screen may be conserved.

In the Kodak DC25 camera, which includes an optical viewfinder and a color LCD display, a still image is read from its sensor and temporarily stored in a buffer memory. The image is then read from the buffer, processed, and stored on a removable memory card, which altogether typically takes 5 to 10  
5 seconds. Since the color LCD requires a backlight in order to provide a bright image, it draws a substantial amount of power when it is turned on. To allow reduced battery drain, the DC25 camera includes a display switch so the user can manually turn the display on and off. In order to immediately view images captured by the DC25 camera, the user must first push the display switch to turn  
10 on the display before capturing an image. Therefore, the LCD display is powered even during the time the user is looking through the optical viewfinder to compose an image. Once the user presses a shutter button and takes an image, a low resolution version of the image from the buffer memory is immediately displayed on the LCD display. At the same time a high resolution version is being processed  
15 and stored in the removable memory card.

In order to reduce memory space, the DC25 camera includes an erase button that can be used to delete one or more images from the removable memory. If the displayed image is unacceptable, the user typically wants to immediately erase the unacceptable image and take a new picture of the same  
20 scene. With the DC25 camera, however, the user must wait until the high resolution processing is completed, which takes 5 to 10 seconds. Therefore, the user is not able to immediately take a new image, but must instead wait until the processing of the undesired image is completed. As a result, the camera wastes battery power by creating and storing an image file that will be immediately  
25 deleted. Moreover, the picture opportunity may be lost due to the interim wait.

In the type of camera that relies on an optical viewfinder for image composition, what is needed is an LCD based camera design that enables users to quickly view and (when desired) immediately erase newly taken images, while minimizing the camera battery drain by powering the LCD only when necessary to  
30 review an image.

## SUMMARY OF THE INVENTION

The present invention is directed to overcoming one or more of the problems set forth above. Briefly summarized, according to one aspect of the  
35 present invention, an electronic camera includes a sensor for capturing an image, an electronic image display for displaying the captured image, and a quick view feature in which the image display is automatically turned on for a period of time

after an image is captured, and then automatically turned off. The quick view feature is embodied in a control section responsive to the quick view feature for powering up the image display after the image is captured by the sensor in order to display the captured image, and then automatically turning off the image display after the period has elapsed.

In a further embodiment, the camera includes a first buffer memory for storing the captured image, a processor for performing image processing on the captured image over a period of time and generating a processed image file therefrom, and a second memory for storing the processed image file. The user interface further provides an erase command to the processor, which responds to the erase command by terminating the processing of the image file and deleting the partially completed image file from the second memory.

Typically, the image is read from the buffer, processed, and stored on a removable memory card, which typically takes 5 to 10 seconds. The advantage of the invention lies in the "quick view" feature, which reduces battery drain. When this feature is enabled, the LCD display is turned on immediately after each picture is taken, typically for about 3 seconds, and then turned off. This allows the user to verify that an acceptable image was taken. If so, the user waits until the processing is completed, and can then take the next image. The LCD display remains "off" most of the time to reduce battery drain, without requiring the user to manually turn it on and off. When displaying a newly taken image, the LCD display includes an "erase" icon. If a user does not want to keep a new image, a delete key is pressed. This immediately stops the current image from being processed. Therefore, a new image can be taken immediately, rather than waiting for the processing to be completed.

These and other aspects, objects, features and advantages of the present invention will be more clearly understood and appreciated from a review of the following detailed description of the preferred embodiments and appended claims, and by reference to the accompanying drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a digital camera including a quick review and quick erase feature according to the invention.

FIG. 2A, 2B, 2C are views of the camera enclosure showing the user interface and other features accessible to a user of the camera shown in Fig. 1.

FIG. 3 is a flow diagram showing operation of the camera shown in Fig. 1 according to the invention.

## DETAILED DESCRIPTION OF THE INVENTION

Because digital cameras employing electronic sensors and electronic processing and storage are well known, the present description will be directed in particular to elements forming part of, or cooperating more directly with, apparatus in accordance with the present invention. Elements not specifically shown or described herein may be selected from those known in the art. Certain aspects of the embodiments to be described may be provided in software. Given the system as described in the following materials, all such software implementation needed to practice the invention is conventional and within the ordinary skill in such arts.

Referring first to Figure 1, a digital camera 10 includes a zoom lens section 12 for directing image light toward an image sensor 14, a processing section 16, and a removable output memory 18, such as a flash memory card. The image sensor 14 is typically a color sensor, and includes a color filter array, such as the well-known Bayer pattern (see U.S. Patent No. 3,971,065). The processing section 16 includes an analog signal processing and A/D converter 20, a DRAM buffer memory 22, an image processing block 24 (which may be a programmable DSP capable processor, such as a Hitachi SH-DSP processor), and an output interface 26 to the removable memory 18. The output interface 26 is a memory card interface adapted to a conventional card interface standard, such as the PCMCIA card interface standard, such as described in the PC Card Standard, published by The Personal Computer Memory Card International Association, Sunnyvale, California, March 1997. The removable memory 18 accordingly is a non-volatile PCMCIA memory card containing either solid state memory, such as Flash EPROM memory, or a small hard drive (categorized as a PCMCIA-ATA Type III Hard Drive under the PCMCIA card interface standard). Another card interface standard is the CompactFlash ATA with DOS file format. Alternatively, other non-volatile storage devices may be used, such as a floppy disk magnetic medium or optical storage (in such cases, a suitable interface and a conventional read/write apparatus would be provided in the camera 10, e.g., a magnetic or optical read/write head).

The DRAM buffer memory 22 has sufficient memory space for at least one full resolution image captured by the image sensor 14. The camera 10 also includes a zooming optical viewfinder 28, an image liquid crystal display (LCD) 30, a control section 31 including a control processor and timing generator 32, a flash unit 34, a status LCD 36, and a user interface comprising a group of user controls 38. Nearby, or within, the optical viewfinder is a ready light 40 that is connected to the control processor and timing circuit 32. A set of autofocus and autoexposure detectors 42 provide data to the control processor and timing circuit 32 for driving zoom and focus motors 44 connected to the zoom lens 12, and for enabling clock drivers 46 in order to activate the image sensor 14.

The control section 31 further includes a power management controller 48, which is connected to the control processor and timing generator 32 for conserving power demands by the various components of the camera 10. Power supplied by batteries 50 is applied on demand to the clock drivers 46, the processing section 16, and the image LCD 30. More specifically, a capture power enable line 52 supplies power to the clock drivers 46 and the analog signal processing and A/D converter 20 and a separate process power enable line 54 supplies power to the DRAM buffer memory 22, the image processing block 24, and the memory card interface 26. The power management controller 48 also enables LCD drivers 56 to input data from the DRAM buffer memory 22 to the image LCD 30, and further enables an LCD backlight 58 to provide a variable amount of backlight to the image on the image LCD 30. In the preferred embodiment, the image LCD 30 is a color LCD for displaying color images.

Figure 2A shows a view of the camera 10 from the front, showing the aforementioned zoom lens section 12, the optical viewfinder 28, the flash unit 34, and certain of the user controls 38--including a shutter button 60, and telephoto and wide angle buttons 62, 64 for controlling the zoom lens section 12. The camera also includes a viewfinder cover 63 which is slid open (as shown in Figure 2A) to power up the camera. Figure 2A also shows a pair of autofocus sensors 65. The image LCD 30 is part of a flip up section 66 on the back of the camera 10. Figure 2B shows the camera back with the flip up section "down", and Figure 2C shows the camera back with the flip up section "up". The camera back includes the aforementioned image LCD 30, the status LCD 36, the back of the optical viewfinder 28, the ready light 40, and a further set of user controls 38--including a TAB button 68, a select button 70, and an enter button 72 for the status display 36; and a quick view switch 74, an erase button 76, and display button 78 for the image LCD 30. The status LCD 36 displays camera status information,

such as the number of images that can still be stored, the flash setting (auto, off, fill), the battery level, and the compression level setting. The tab, select, and enter buttons 68, 70, 72 enable the user to modify these settings. When the flip-up screen 66 is "up", as shown in Figure 2C, a cover 80 for the batteries 50 is revealed, as well as a card slot 82 for the removable memory 18, a card eject button 84, and an LCD brightness wheel 86 for controlling the LCD backlight 58. A handle 88 is further included on the side of the camera 10 for hand holding the camera.

10 A flow diagram of the steps involved in a typical picture-taking situation is shown in Figure 3, and will be referenced in connection with the following operational description of the camera. The user turns the camera on by sliding open the viewfinder lens cover 63 (step 100 of Figure 3), which enables a hidden power switch (not shown). When the camera is powered up, the image LCD 30 initially remains off, to save power, and the ready light 40 in the  
15 viewfinder 28 is turned on (step 102), indicating to the user that the camera is ready to take a picture. If the auto exposure detector 42 reads a low ambient light condition, the flash 34 is turned on, and the ready light 40 does not light until the flash is sufficiently charged. When the quick view switch 74 is set to its "on" position (step 104), the camera LCD operates in the quick view mode as images  
20 are captured.

The user looks through the optical viewfinder 28 to compose the image (step 106), pressing the telephoto or wide angle buttons 62,64 to set the zoom lens to the desired focal length. Once the picture is composed, the user presses the shutter button 60 (step 108). The camera control processor and timing  
25 generator 32 then generates the signals that expose the sensor 14, and clock out the sensor signal. The analog signal from the sensor is processed in the analog signal processor 20, which performs correlated double sampling and A/D conversion, and then stored in the DRAM buffer memory 22 (step 110).

If the quick view mode is enabled (step 112), the image processing  
30 block 24 subsamples the high resolution Bayer color filter array image stored in the buffer memory 22 in order to create an image with the proper number of pixels needed for the display on the image LCD 30 (step 114). The subsampled image is then stored back into the buffer memory 22. This processing can be done quickly, typically in less than 1 second. The image LCD 30 is then turned on, and the  
35 image is retrieved from the buffer 22 and displayed on the screen of the image LCD 30 for a predetermined period of time. This predetermined period of time may be a set period of time, for example 3 seconds (step 116), a period of time

adjustable by the user, or a period of time that corresponds to the processing time in the image processing block 24. In the latter case, the predetermined period of time may vary somewhat depending on the extent of processing that occurs. This allows the user to review the image, to see if it is acceptable. After the preset  
5 time, the image LCD 30 is turned off, in order to minimize the battery drain (step 118). (Alternatively, if battery drain is not of major concern, the image LCD 30 may stay on until the quick view switch 74 is again pressed - perhaps with backup auto turnoff after, say, 10 seconds.)

Once the LCD size image is stored in the buffer memory 22 (step  
10 114), the image processing block 24 begins processing the full resolution Bayer image (step 120). This processing includes, for example, color filter array interpolation, white balance, color correction, edge enhancement, image compression, and file formatting. The resulting image file is stored on the removable memory card 18 in a standard image file format, such as the JPEG  
15 interchange format (JIF) described in ISO/IEC 10918-1:1994. A typical JPEG compression algorithm is the Discrete Cosine Transform (DCT). Depending on the size of the sensor 14 and the amount of detail in the scene, this processing may take 5 to 10 seconds to complete. Based on the image displayed on the image LCD 30, the user may decide that the picture just taken is unacceptable, for  
20 example if the framing was not good, or if the subject of the picture was not smiling. Rather than wait for the image to be completely processed and stored, the user can press the erase button 76 (step 122). This immediately halts the image processing (step 124), and causes the partially completed JIF file to be deleted from the memory card 18 (step 126). The ready light is then illuminated,  
25 indicating that the camera is immediately ready to take the next picture (step 128). If the erase button is not pressed, the image processing is completed as normal (step 130).

As mentioned above, the camera provides the image LCD 30 with three controls: the quick view switch 74, the erase button 76, and the display  
30 button 78. When the display button 78 is pushed, the screen of the image LCD 30 displays the last image stored on the removable memory card 18. The image LCD 30 can be turned off by pressing the display button 78 a second time. In the image review mode, the zoom buttons 62,64 are additionally used to cycle through the images stored on the card in forwards or backward order. An image may be  
35 erased from the card by using the erase button 76. The erase button 76 is positioned at a level below the camera case, to reduce the chance of accidental erasures.

The invention has been described with reference to a preferred embodiment. However, it will be appreciated that variations and modifications can be effected by a person of ordinary skill in the art without departing from the scope of the invention. For example, while the preferred embodiment shows a

- 5 switch for enabling the quick view feature, the camera may be designed such that the feature is always enabled and therefore always provides a timed replay of the just-captured image. Moreover, the invention can also be applied to a motion sequence capture device, e.g., the burst capture mode of a still camera, where the quick view feature would entail replay of one or more images in the burst
- 10 sequence.

053310-01-0000

## PARTS LIST

	10	digital camera
	12	zoom lens section
<b>5</b>	14	image sensor
	16	processing section
	18	removable output memory
	20	analog signal processor and A/D converter
	22	DRAM buffer memory
<b>10</b>	24	image processing section
	26	interface
	28	zooming optical viewfinder
	30	image LCD
	31	control section
<b>15</b>	32	control processor and timing generator
	34	flash unit
	36	status LCD
	38	user controls
	40	ready light
<b>20</b>	42	autofocus and autoexposure detectors
	44	zoom and focus motors
	46	clock drivers
	48	power management controller
	50	batteries
<b>25</b>	52	capture power enable line
	54	process power enable line
	56	LCD drivers
	58	LCD backlight
	60	shutter button
<b>30</b>	62	telephoto button
	63	viewfinder cover
	64	wide angle button
	65	autofocus sensors
	66	flip up section
<b>35</b>	68	TAB button
	70	select button
	72	enter button

- 74 quick view switch
- 76 erase button
- 78 display button
- 80 cover
- 5 82 card slot
- 84 card eject button
- 86 LCD brightness wheel
- 88 handle

10



**WHAT IS CLAIMED IS:**

1. An electronic camera for capturing and displaying one or more images, said camera comprising:
  - 5 a sensor for capturing an image;
  - an electronic image display for displaying the captured image; and
  - a quick view feature in which the image display is automatically turned on, without user intervention, for a period of time after an image is captured, and then automatically turned off, said quick view feature including a
  - 10 control section for powering up the image display after the image is captured by the sensor in order to display the captured image, and then automatically turning off the image display after the period has elapsed.
2. A camera as claimed in claim 1 further including a memory
- 15 section for storing the captured image.
3. A camera as claimed in claim 2 wherein the memory section includes a buffer memory for storing the captured image in order that it may be quickly displayed by the image display during an initial review and an
- 20 output memory for storing the captured image after it has been judged to be acceptable during the initial review.
4. The camera as claimed in claim 3 wherein the camera includes a processing section for operating on the captured image in order to store
- 25 the captured image in the output memory and the user interface provides an erase command to the processing section to erase the captured image.
5. An electronic still camera for capturing and displaying images, said camera comprising:
  - 30 an optical viewfinder for composing images prior to capture;
  - a sensor for capturing an image;
  - a first buffer memory for storing the captured image;
  - an electronic image display for displaying the captured image stored in the buffer memory;
  - 35 a processing section for performing image processing on the captured image over a period of time and generating a processed image file

therefrom, said processing section further responsive to an erase command in order to erase the captured image;

a second memory for storing the processed image file;

a user interface for selectively enabling a quick view feature in

5 which the image display is automatically turned on after an image is captured;

an image display controller responsive to the user interface for automatically powering up the image display after the image is captured in order to display the captured image stored in the first buffer memory; and

10 said user interface further providing the erase command to the processing section, which thereupon erases the captured image.

6. The camera as claimed in claim 5 wherein the image display controller automatically powers up the image display for a predetermined period after the image is captured by the sensor in order to display the captured  
15 image stored in the first buffer memory, and then automatically turns off the image display after the predetermined period has elapsed.

7. The camera as claimed in claim 5 wherein the processing section erases the captured image prior to completion of the image processing.  
20

8. The camera as claimed in claim 7 wherein the processing section responds to the erase command by terminating the processing of the image file and deleting the partially processed image file from the second memory.

25 9. An electronic still camera for capturing and displaying images, said camera comprising:

a sensor for capturing the images;

a first memory for storing a captured image;

a second memory for storing a plurality of processed images;

30 a processor for processing images from the first memory and storing the processed images as image files in the second memory, said processor operating over a time interval to process an image; and

a user enabled control section coupled to the processor for erasing an image before the end of the particular time interval.

35

10. The camera as claimed in claim 9 wherein the processor responds to the erase command by terminating the processing and deleting a partially completed image file from the second memory.

5 11. The camera as claimed in claim 9 wherein the camera also includes an electronic image display for displaying the captured image from the first memory.

10 12. The camera as claimed in claim 11 wherein the camera also includes an image display control section to enable the image display to be automatically turned off after displaying the captured image.

15 13. A method for capturing and displaying images with an electronic camera, said method comprising the steps of:  
capturing an image;  
storing the captured image in a buffer memory;  
displaying the captured image stored in the buffer memory;  
performing processing on the captured image in a processing  
section over a period of time, including the generation of a processed image file  
20 therefrom;  
storing the processed image file in a second memory;  
selectively enabling a quick view feature in which the image display is automatically turned on for a period of time after the image is captured in order to display the captured image stored in the first buffer memory, and then  
25 automatically turned off after the period has elapsed; and  
providing an erase command to the processing section, which erases the captured image.

30 14. The method as claimed in claim 13 in which the captured image is erased prior to completion of the processing.

35 15. The method as claimed in claim 14 wherein the captured image is erased by terminating the processing of the image file and deleting the partially processed image file from the second memory.

## ABSTRACT

An electronic camera includes a sensor for capturing an image, an electronic image display for displaying the captured image, and a user interface for  
5 selectively enabling a quick view feature in which the image display is automatically turned on for a set period of time after an image is captured, and then automatically turned off, in order to quickly review the captured image. The camera further includes a processor for performing processing on the captured  
10 image and generating a processed image file therefrom, and a memory for storing the processed image file. When an erase command is provided to the processor, the processing of the image file is terminated and the partially completed image file is deleted from the second memory.

15

1352277 "PT" 01/27/00



Fig 2 A

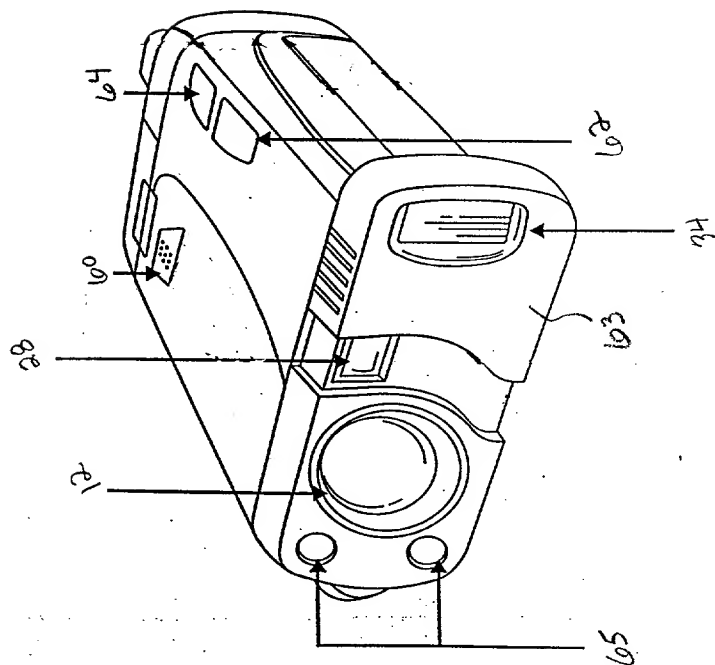


Fig 2c




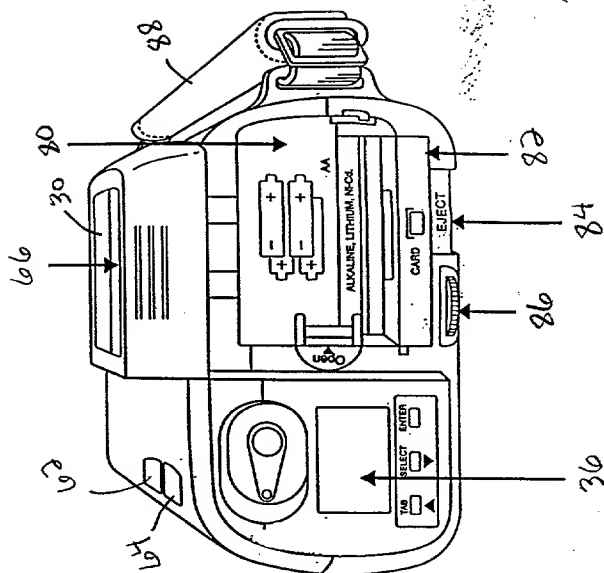


Figure 3 - Example Flow Diagram

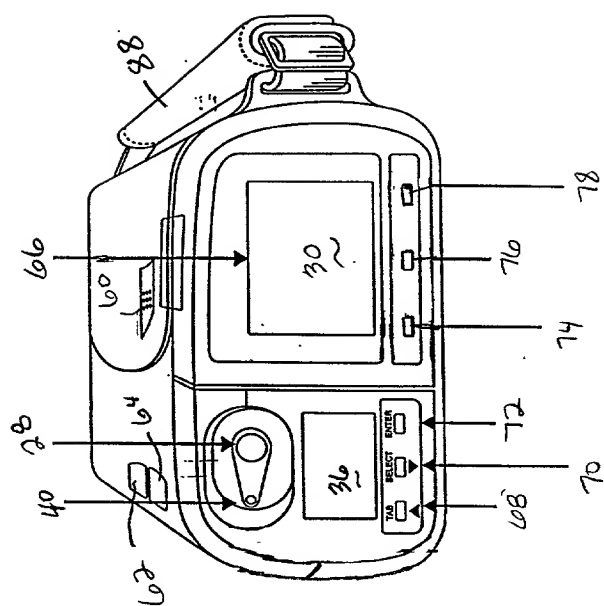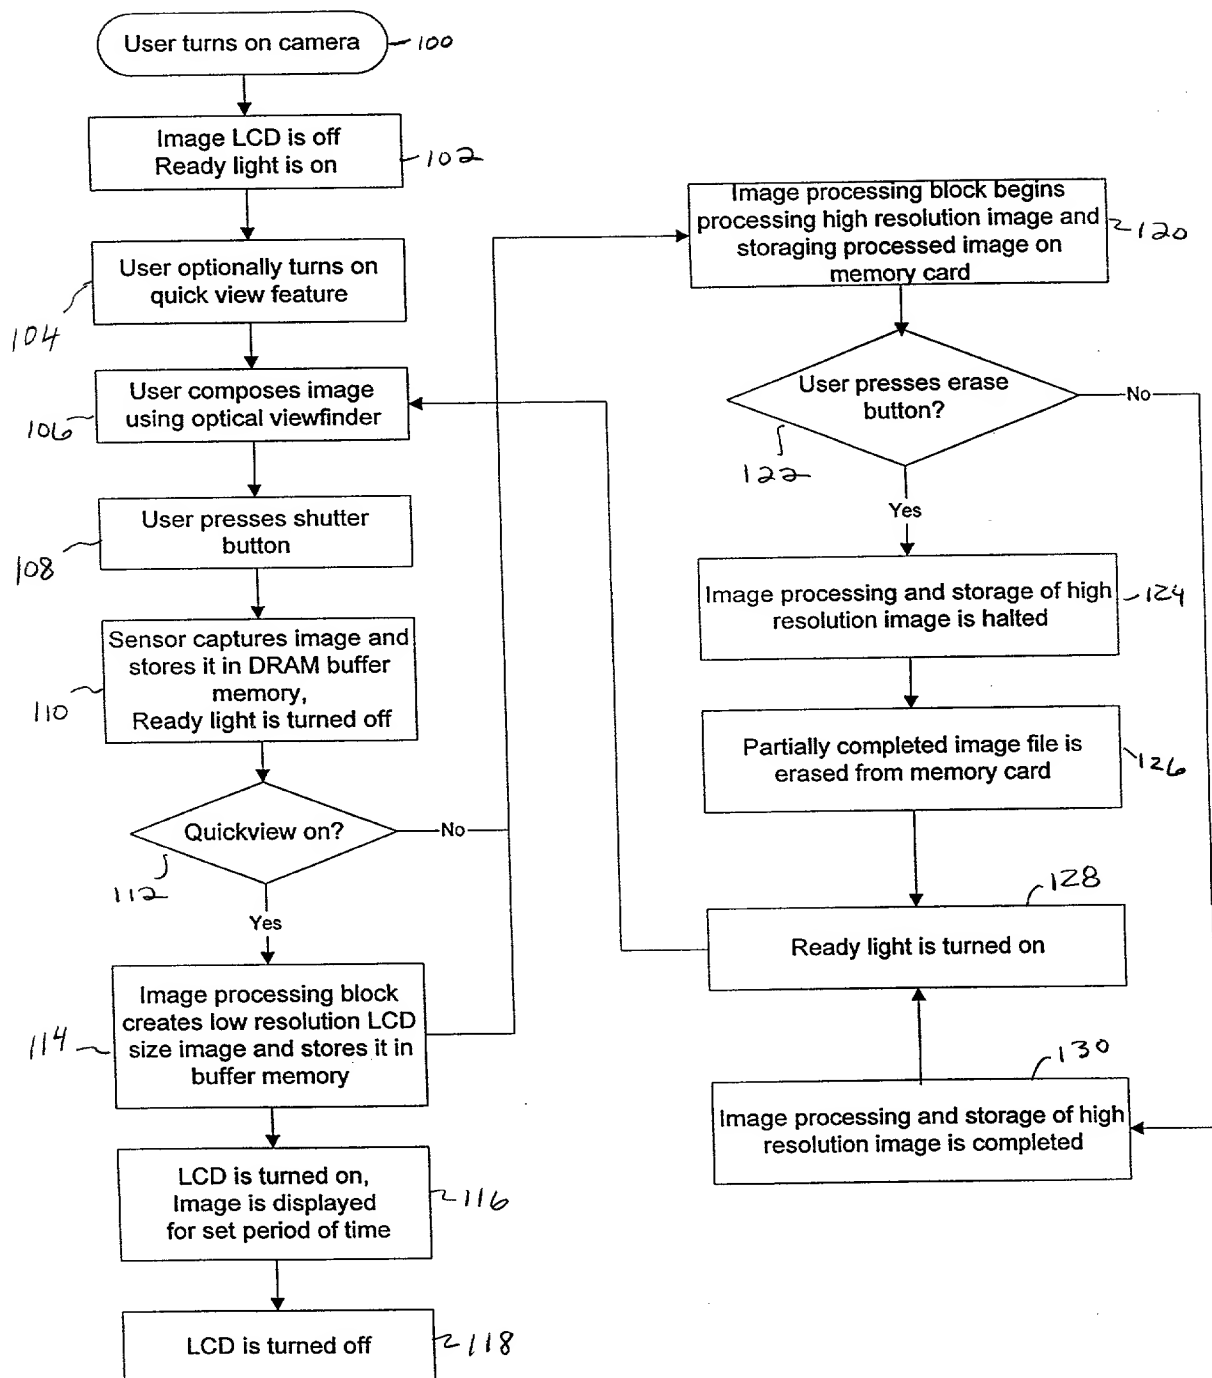

# United States Patent & Trademark Office

Office of Initial Patent Examination – Scanning Division

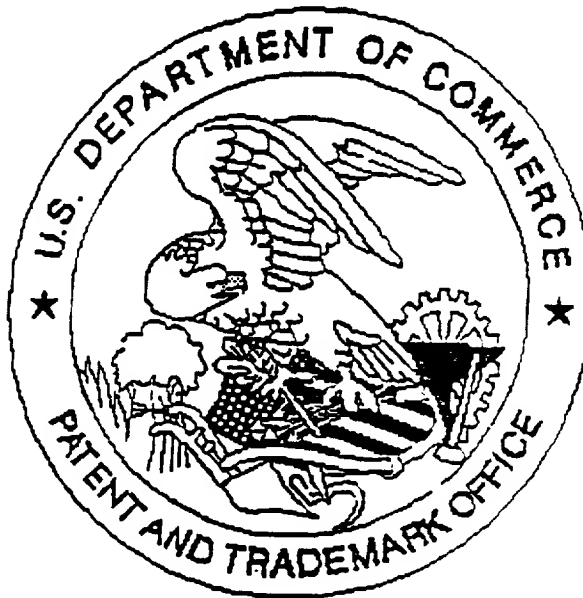

Application deficiencies found during scanning:

1. Application papers are not suitable for scanning and are not in compliance with 37 CFR 1.52 because:
  - ☐ All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2"x 11". Pages \_\_\_\_\_ do not meet these requirements.
  - ☐ Papers are not flexible, strong, smooth, non-shiny, durable, and white.
  - ☐ Papers are not typewritten or mechanically printed in permanent ink on one side.
  - ☐ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
  - ☐ Papers contain hand lettering.
2. Drawings are not in compliance and were not scanned because:
  - ☐ The drawings or copy of drawings are not suitable for electronic reproduction.
  - ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11".
  - ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").
3. Page(s) \_\_\_\_\_ are not of sufficient clarity, contrast and quality for electronic reproduction.
4. Page(s) \_\_\_\_\_ are missing.
5. OTHER: NO DECLARATION